



# DS DA DP(L) DE SERIES

DIP

ROTARY

TACTILE

SELED

ILLUMINATED

PUSH-BUTTON

METAL

MICRO

## STANDARD TYPE DIP SWITCHES

### SPECIFICATIONS

Slide, Right Angle, Piano types are available.

Electrical Life: 2,000 operations min.

Contact Resistance: 50mΩ max.

Insulation Resistance: 100MΩ min

Operation Temp:-20°C ~ 70°C


Operation Force: ≤9.8N max.

Stroke: 2.0 mm


Contact Rating: 25mA@24VDC (switching);

100mA@50VDC (non-switching)


### HOW TO ORDER

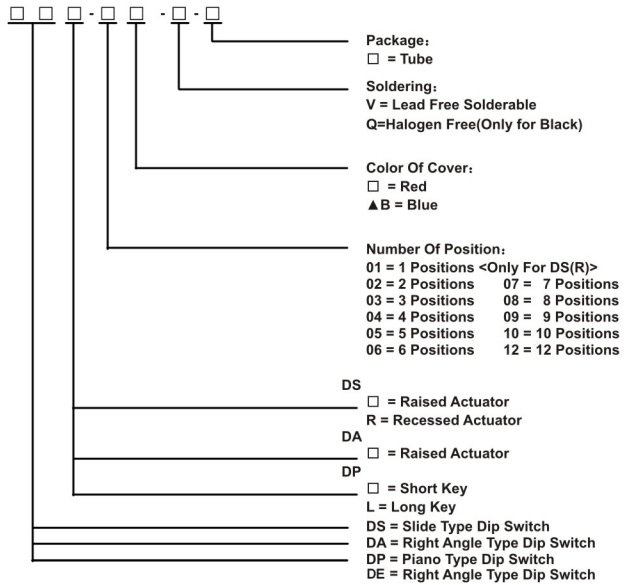


## DA SERIES SLIDE TYPE





### CONTACT SYSTEM

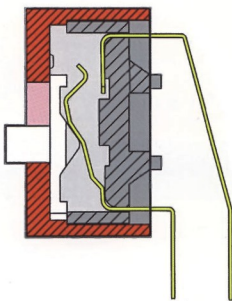


### DIMENSIONS

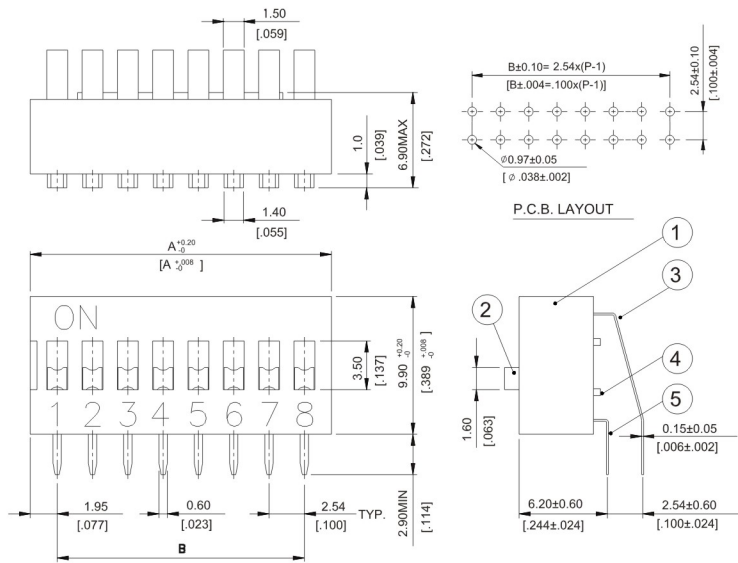


## DE

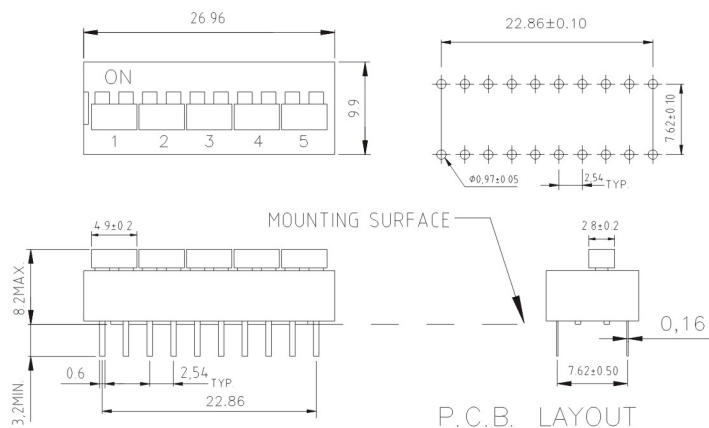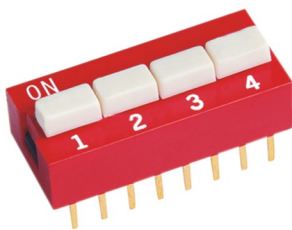



## DS SERIES SLIDE TYPE

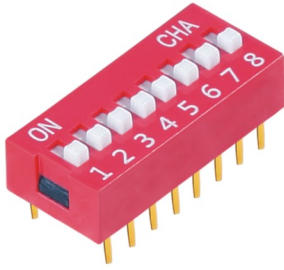


### DIMENSIONS

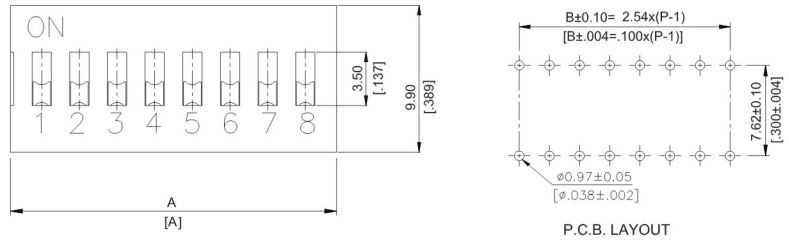


## CONTACT SYSTEM

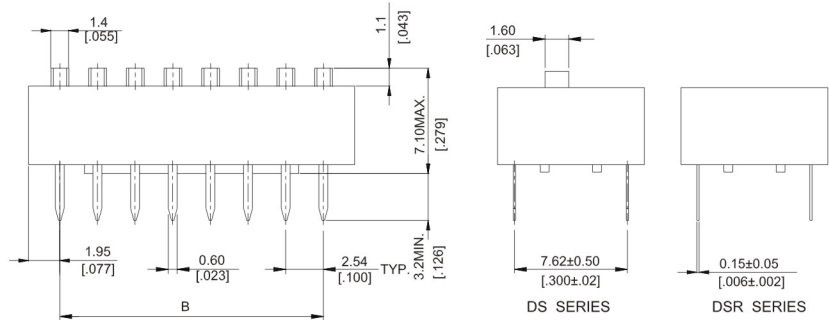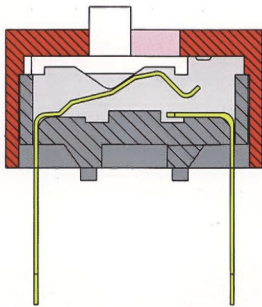

## DP(L) SERIES SLIDE TYPE

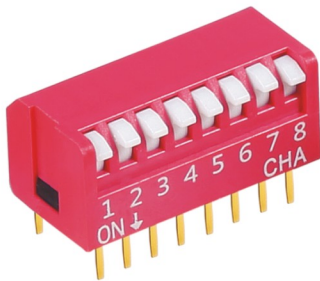

### DIMENSIONS

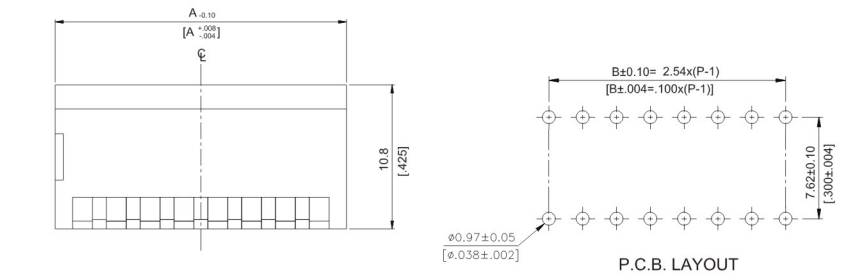

## CONTACT SYSTEM

